

Description

Single or multipole hydraulic-magnetic circuit breakers with trip-free mechanism and toggle actuation. A choice of switching characteristics ensures suitability for a wide range of applications. Industry standard dimensions and panel mounting. Auxiliary contacts optional. Low temperature sensitivity at rated load. Approved to CBE standard EN 60934 (IEC 60934) S-type HM CBE.

Typical applications

In the business fields Communication and Transport: power supplies, switchgear, instrumentation and process control engineering.

Standard current ratings and typical internal resistance values

Current rating (A)	Trip curves and internal resistance (Ω) per pole	
	K1, M1, T1	M2, T2
0.05	452	376
0.1	100	94
1	0.95	0.90
2	0.26	0.20
3	0.10	0.10
5	0.042	0.040
10	< 0.02	< 0.02
15	< 0.02	< 0.02
20	< 0.02	< 0.02
25	< 0.02	< 0.02
30	< 0.02	< 0.02
40	< 0.01	< 0.01
50	< 0.01	< 0.01
60	< 0.01	< 0.01
80	< 0.01	< 0.01
100	< 0.01	< 0.01
125	< 0.01	< 0.01

Interrupting capacity to EN 60934, UL 489 and UL 1077

IEC 60934 – test series E:			
voltage	number of poles	I _N max. (A)	I _{cn} (A)
DC 80 V	1 + 2	0.02...125	10 000
AC 240/415 V	1 - 6	0.02...80	6 x I _N
AC 240 V	1	0.02...20	5 000
UL 489 – test sequence Z:			
voltage	number of poles	I _N max. (A)	I _{cn} (A)
DC 80 V	1 + 2	0.5...125	10 000
AC 120 V	1	0.5...80	5 000
AC 120/240 V	1 (2)	0.5...80	5 000
AC 240 V	1	0.5...20	5 000
UL 1077:			
voltage	number of poles	I _N max. (A)	I _{cn} (A)
DC 80 V	1 + 2	0.02...125	10 000
AC 277/480 V	1 - 6	0.02...70	5 000



Technical data

Voltage rating	3 AC 415 V; AC 277/480 V; AC 120/240 V; AC 240 V; DC 80 V (higher DC voltages to special order)
Current rating range	0.05...125 A single and multipole higher ratings upon request
Auxiliary circuit	AC 240 V 6 A DC 28 V 3 A DC 65 V 1 A DC 80 V 0.5 A
Typical life	10,000 operations at 1 x I _N
Ambient temperature	-40...+85 °C (-40...+185 °F)
Insulation co-ordination (IEC 60664)	2.5 kV/2 reinforced insulation in operating area
Dielectric strength	test voltage
operating area	AC 3,000 V
pole to pole	AC 1,500 V
main to auxiliary circuit	AC 3,000 V
switching to trip circuit	AC 1,500 V
Insulation resistance	> 100 MΩ (DC 500 V)
Degree of protection (IEC 60529)	operating area IP40 terminal area IP00
Vibration	
upside down:	10 g (57-2000 Hz) ± 0,76 mm (10-57 Hz) at 0.9 I _N
directions 1, 2, 3, 4, 5:	10 g at 1 x I _N
with curves F1, F2:	10 g at 0.8 x I _N in all planes. (57-2000 Hz) ± 0.76 mm (10-57 Hz) to IEC 60068-2-6, test Fc 10 frequency cycles/axis
Shock	
directions 1, 2, 3, 4, 5:	100 g (11 ms) at 1 x I _N ,
direction 6:	100 g (11 ms) at 0.8 x I _N ,
with curves F1, F2:	100 g (11 ms) at 0.8 x I _N to IEC 60068-2-27, test Ea
Corrosion	96 hours at 5% salt mist, to IEC 60068-2-11, test Ka
Humidity	240 hours at 95 % RH, to IEC 60068-2-78, test Cab
Mass	approx. 90 - 120 g per pole depending on version

Approvals

VDE (EN 60934)	1- to 6-pole
UL 489	-
UL 1077	1- to 6-pole
CCC	1- to 4-pole

Ordering information for UL 489

Type No.
8345

Mounting

- B** flange mounting, with rectangular aperture with mounting nut 6-32UNC
- C** flange mounting, with rectangular aperture with mounting nut M3
- F** flange mounting, with round aperture with mounting nut M3

Configuration

- 0** without barrier for DC
- 1** with small barrier for DC (optional)
- 2** with large barrier for AC

Number of poles

- 1** single pole protected
- 2** two pole protected

Actuator configuration

- A** all poles with standard toggle
- B** reduced number of standard toggles
- Z** without actuator

Terminal design

- P** blade terminals ≤ 35 A
- R** round connectors 6 mm
- U** stud terminals M6 ≤ 125 A
- V** stud terminals 1/4-20UNC-3A ≤ 125 A
- W** laminated round terminals ≤ 125 A

Terminal hardware

- 0** without
- 3** with washer and nut

Characteristic curve

- K1** short delay DC
- M1** medium delay DC
- M2** medium delay AC
- T1** long delay DC
- T2** long delay AC

Version

- D** standard

Colour configuration

- B1** black actuator

Marking

	front plate	actuator base
B1	without	ON-OFF
B2	I _N	ON-OFF

Rated voltage

- B** AC or ≤ 80 V DC

Current ratings

- 0.05...125 A for DC
- 0.05...20 A for AC
- higher current ratings upon request

Approvals (optional)

- V** UL 489

8345 - C 0 1 A - U 3 M1 - D B1 B1 B - 60 A - . ordering example

Remote trip coil available to special order!

Ordering information for auxiliary contact module

Type number
X8345

Module

- S** auxiliary contact module

Auxiliary contacts

- 01** in all poles
- 02** in pole 1 only

Auxiliary contact version

- K** auxiliary contacts, tin-plated (symmetrical terminals)

Auxiliary contact function

- W1** 1 changeover

Terminal design


- 02** microswitch with blade terminals
DIN 46244-A2.8-0.5
- M** mounted to base unit

X8345 - S 01 K W1 02 M ordering example

Dimensions


Mounting version B/C

Flange mounting rectangular aperture



number of poles 1 to 4


pole 1 2 3 4




mounting thread M3 or 6-32
all dimensions referred to the top edge
mounting depth 4.2 mm/.165 in.
max. insertion depth 5.5 mm
max. tightening torque 0.33 Nm

Cut-out dimensions:

1-pole




multipole

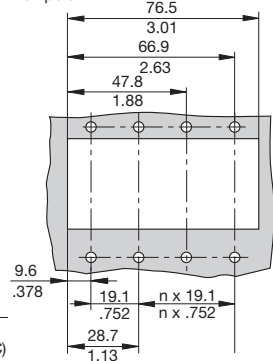


Mounting version F

Flange mounting round aperture



number of poles 1 to 4


pole 1 2 3 4




mounting thread M3 or 6-32
all dimensions referred to the top edge
mounting depth 4.2 mm/.165 in.
max. insertion depth 5.5 mm
max. tightening torque 0.33 Nm

Cut-out dimensions:

1-pole




4-pole




max. panel thickness: 3 mm

Installation drawing

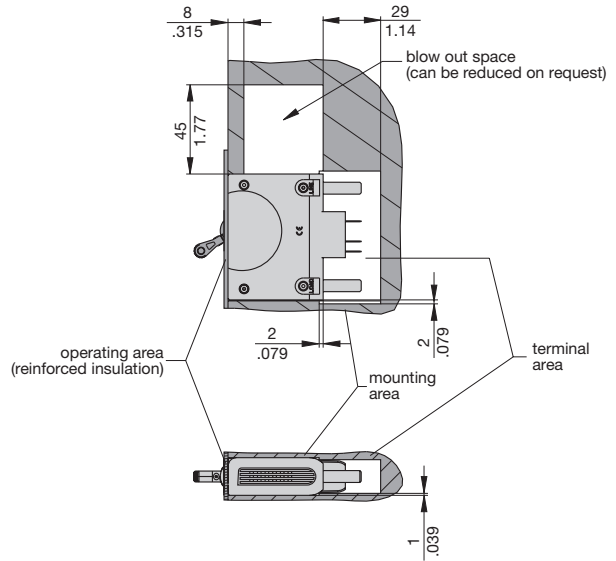


Terminal design / Dimensions

P - with blade terminals

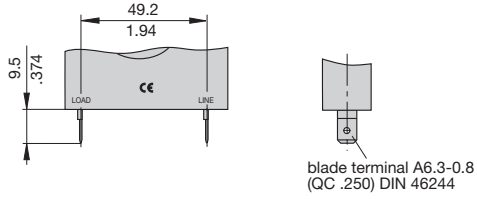


R - round connectors


D = 6 mm (dia . 236) (version H) asymmetrical terminals (not for UL 489)




U/V - with auxiliary contacts (version H) asymmetrical terminals (not for UL 489)

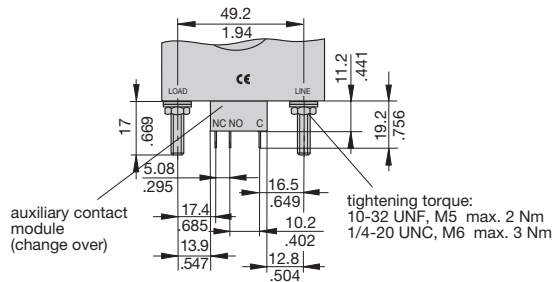

auxiliary contacts version K symmetrical terminals




W - laminated round terminals

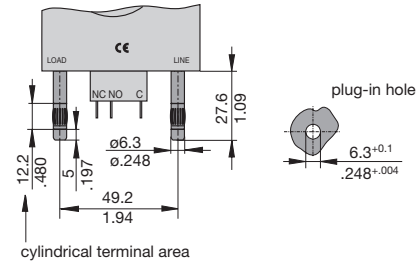


Internal connection diagrams


1-pole protected magnetically



multipole

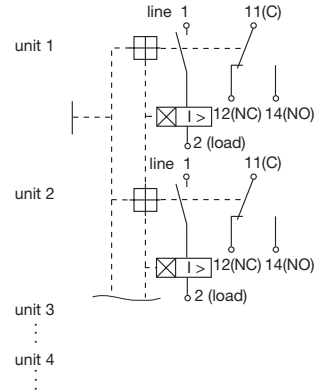

1-pole protected hydraulic-magnetically




This is a metric design and millimeter dimensions take precedence (mm/inch)


Typical time/current characteristics at +23 °C / +73.4 °F

(trip time at rated current and all poles symmetrically loaded)


Curve K1 (short delay) for DC

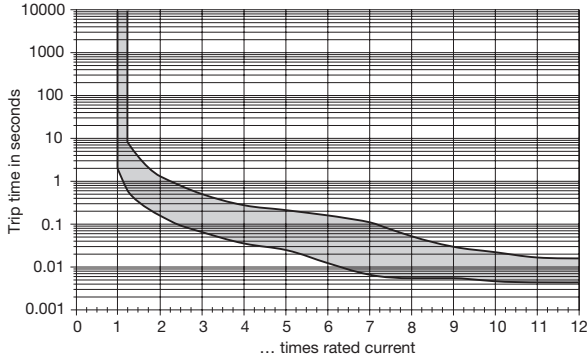


Curve M0 (medium delay) for AC/DC

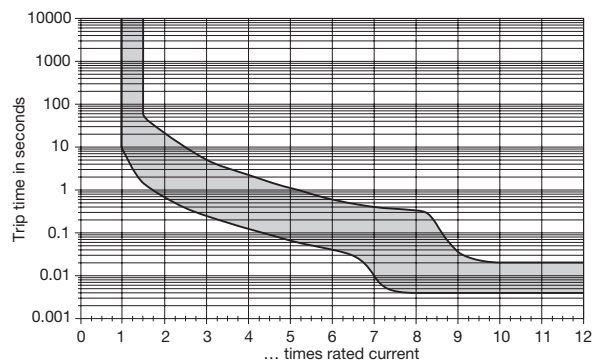


Curve M1 (medium delay) for DC

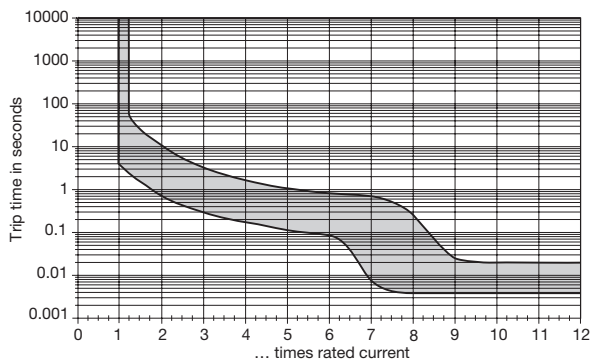


Curve T1 (long delay) for DC

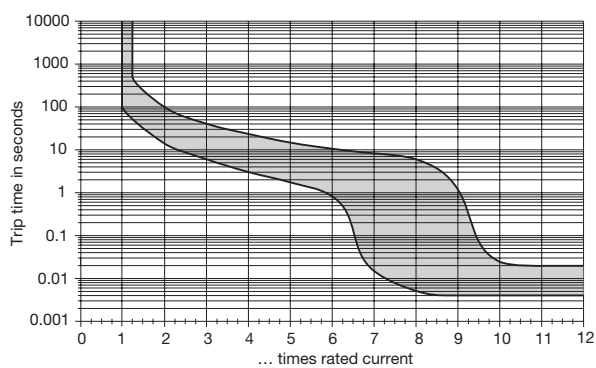

Curve M2 (medium delay) for AC 50/60 Hz

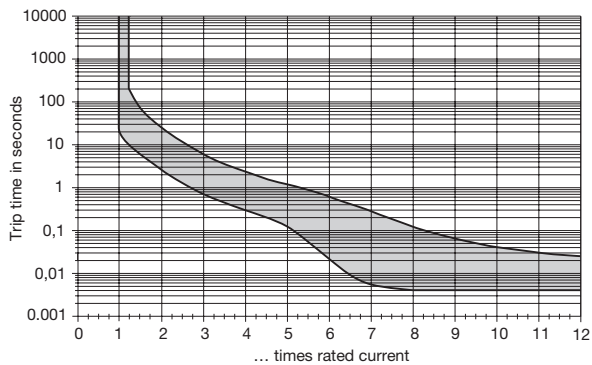

Curve T2 (long delay) for AC 50/60 Hz

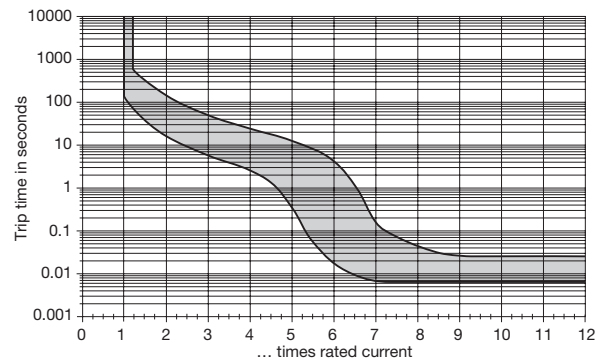


All curves will only be maintained if the escutcheon is mounted on a vertical surface.

Other characteristic curves to special order (e. g. pulse delayed, for high inrush currents or capacitive loads).


4

Actuator configuration


A 1 toggle per pole, mounting version B/C

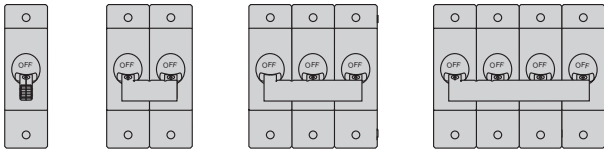


B reduced number of toggles per unit, mounting version B/C




Z without toggles

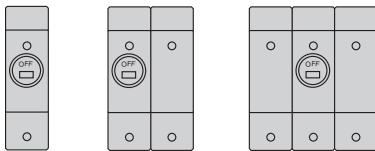

A 1 toggle per pole, mounting version F

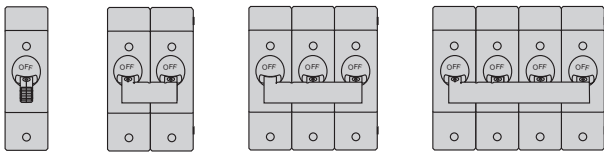


B reduced number of toggles per unit, mounting version F



Interphase barriers / Dimensions

1 - Interphase barrier (small)

2 - Interphase barrier (large)

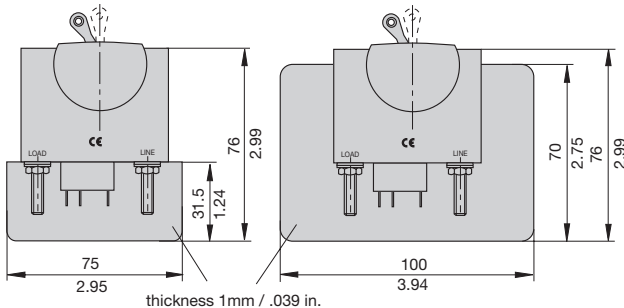



This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.


Accessories

Splash cover (IP65) for 1-, 2-, 3-pole (only for mounting version B/C)


	number of poles	mounting version	actuator configuration
X 222 444 01	1-pole	B	1
X 222 444 02	1-pole	C	1
X 222 444 11	2-pole	B	2
X 222 444 12	2-pole	C	2
X 222 444 21	3-pole	B	3
X 222 444 22	3-pole	C	3

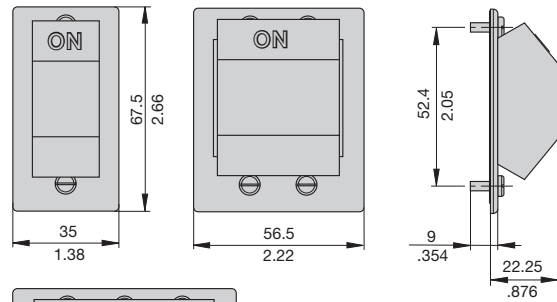

Toggle guard (only for mounting version B/C)
Y 307 381 01



Shock directions

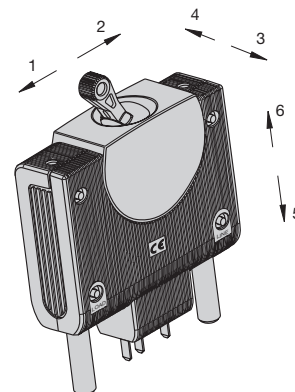

Description

A module which adds remote trip capability to all versions of type 8345. A voltage applied across the coil, by means of an external sensor for example, will cause disconnection of the main switch/circuit breaker mechanism.


Typical applications

Electrical monitoring of safety systems, remote trip.


Ordering information

Type No.	
X8345	Module for type 8345
Module	
F	remote trip module
Assembly version	
01	only in pole 1
02	only in pole 2
Remote trip version	
X1	DC
Voltage rating	
24	24 V
48	48 V
Terminal design	
02	blade terminals DIN 4644-A2.8-0.5
M	module mounted to circuit breaker
X8345 - F 01 X1 24 02 M ordering example	

Dimensions

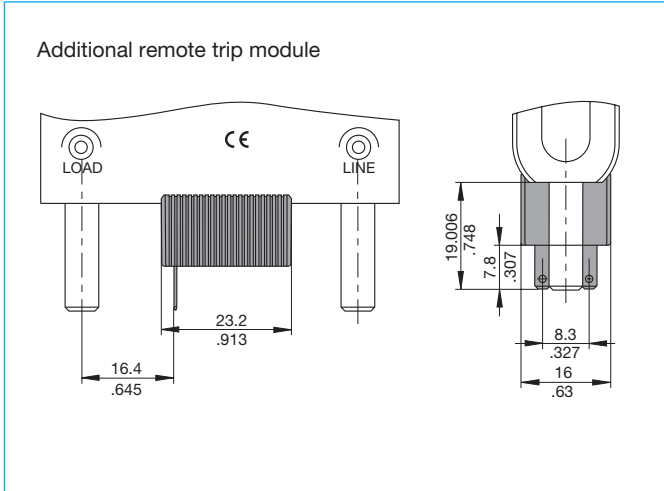

Internal connection diagram

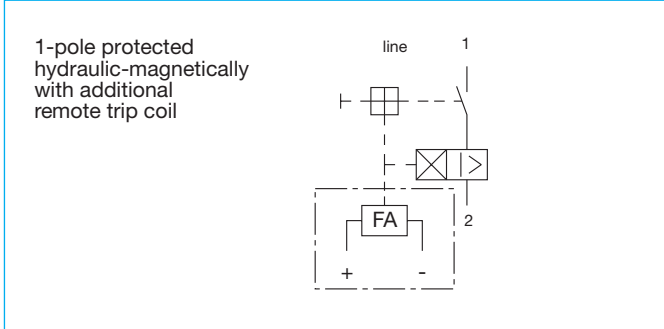

Technical data

Voltage ratings	DC 12 V; DC 24 V; DC 48 V
Power consumption	approx. 40 W
Pulse operation	20 ms < t _{ON} < 100 ms / t _{OFF} > 10 sec (Continuous duty possible for multipole devices upon request)
Typical life	10,000 operations at U _N
Ambient temperature	-40...+85 °C (-40...+185 °F)
Insulation co-ordination (IEC 60664)	2.5 kV/2 (EN 60934)
Dielectric strength	test voltage
between main circuit and trip coil circuit	AC 3,000 V (EN 60934)
Insulation resistance	> 100 MΩ (DC 500 V)
Vibration	6 g (57-2000 Hz) ± 0.46 mm (10-57 Hz) shock direction 1/2 4 g (57-2000 Hz) ± 0.30 mm (10-57 Hz) shock direction 3/4 3 g (57-2000 Hz) ± 0.23 mm (10-57 Hz) shock direction 5/6 to IEC 60068-2-6, test Fc 10 frequency cycles/axis
Shock	100 g (11 ms) (not when mounted upside down) to IEC 60068-2-27, test Ea
Corrosion	96 hours at 5 % salt mist, to IEC 60068-2-11, test Ka
Humidity	240 hours at 95 % RH to IEC 60068-2-78, test Cab
Mass	approx. 8.5 g (without base unit)

4 Preferred types **NEW**

Preferred types remote trip module:
X8345-F-01-X1-24-02-M
X8345-F-01-X1-48-02-M

Voltage ratings and typical internal resistance values

Current rating (A)	Internal resistance (Ω)
DC 12 V	3.4
DC 24 V	13.9
DC 48 V	64.3

This is a metric design and millimeter dimensions take precedence (mm/inch)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.

Description

The X8345-R is an additional module which provides remotely controlled ON and OFF functionality for the E-T-A series 8345 magnetic circuit breaker range. The module actuator, which is motor driven, is factory fitted adjacent to the circuit breaker(s) which it is controlling. The module can be operated by a suitable external changeover switch, momentary switches (one ON, one OFF) or logic system (not part of our product). The status of the actuator will follow the position of the external switch, i.e. if the circuit breaker trips electrically or is operated manually, the actuator will not change.

A single module will control a single pole breaker or multipole circuit breakers up to 2 poles. In the application it has to be ensured that the supply voltage is maintained at all times.

When switching the circuit breaker OFF manually the module has also to be switched off by means of the changeover switch before switching the breaker on again. The same is true for normal switch-on of the breaker.



X8345-R

Ordering information

Type number

X8345 Module for type 8345, 1 and 2 pole (3 pole upon request)

Module

R remote ON/OFF actuation

Operating voltage

12 DC 12 V

24 DC 24 V

Add-on version

01 mounted on right side

Mounting method

00 front panel mounting (standard)

02 2-bracket: module and circuit breaker fitted

Terminal design

01 spring loaded screwless terminal 5-pin

Supply status

M module mounted to the base unit

X8345 - R 24 01 00 01 M ordering example

Note: Bold-type, blue configurations are standard versions which are presently available.

Preferred types Remote-Control

NEW

X8345-R-24-01-00-01-M


X8345-R-24-01-02-01-M

Technical data


Voltage rating	DC 12 V (9...16 V)	DC 24 V (16...32 V)
ON duty	50 % / 60 sec	
Trip time	< 2 sec	
Blocking current	approx. 2 A	< 1.5 A
Control current	< 3 mA	
Typical life	10,000 operations (ON/OFF)	
Ambient temperature	-25...70 °C (-13...158 °F)	
Insulation co-ordination (IEC 60664)	2.5 kV/2 (EN 60934)	
Dielectric strength pole to module	test voltage AC 1,500 V (EN 60934)	
Insulation resistance	> 100 MΩ (DC 500 V)	
Vibration	10 g (57-2000 Hz), ± 0,76 mm (10-57 Hz) to IEC 60068-2-6, test Fc, 10 frequency cycles/axis	
Shock	100 g (11 ms) to IEC 60068-2-27, test Ea	
Corrosion	96 hours at 5% salt mist, to IEC 60068-2-11, test Ka	
Humidity	240 hours at 95 % RH, to IEC 60068-2-78, test Cab	
Mass	approx. 65 g (without base unit)	

Internal connection diagrams

single pole, hydraulic-magnetic protection, with remote ON/OFF actuation (operated by changeover switch)

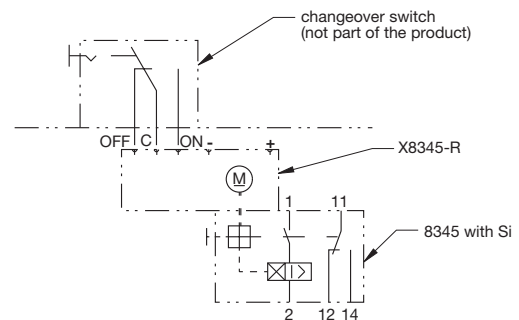



single pole, hydraulic-magnetic protection, with remote ON/OFF actuation (actuated by two momentary switches)

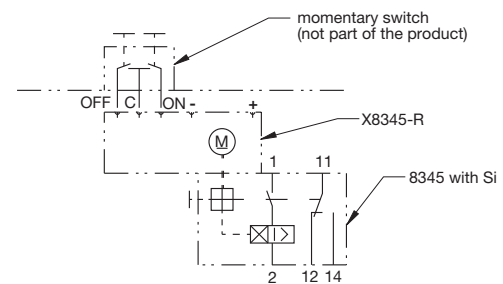

Typical applications


Remote circuit breaker control (ON/OFF) for communication systems, marine installations, automation equipment and similar requirements.

Dimensions

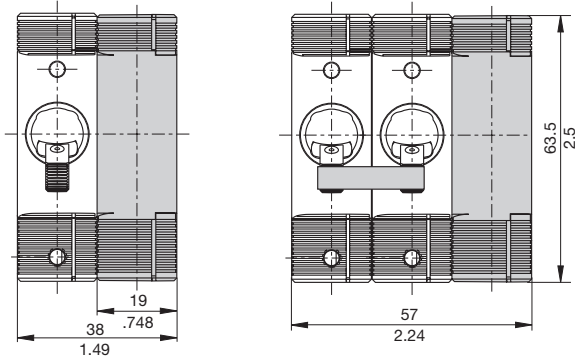


spring loaded screwless terminal 5-pin

X8345-R-24-01-00-01-M

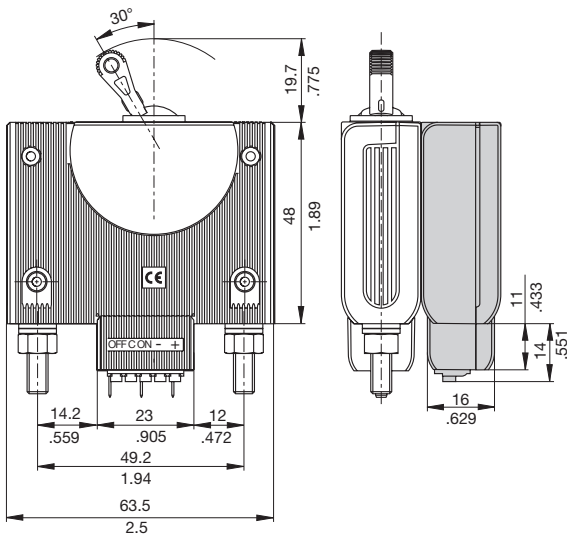

X8345-R-24-01-02-01-M

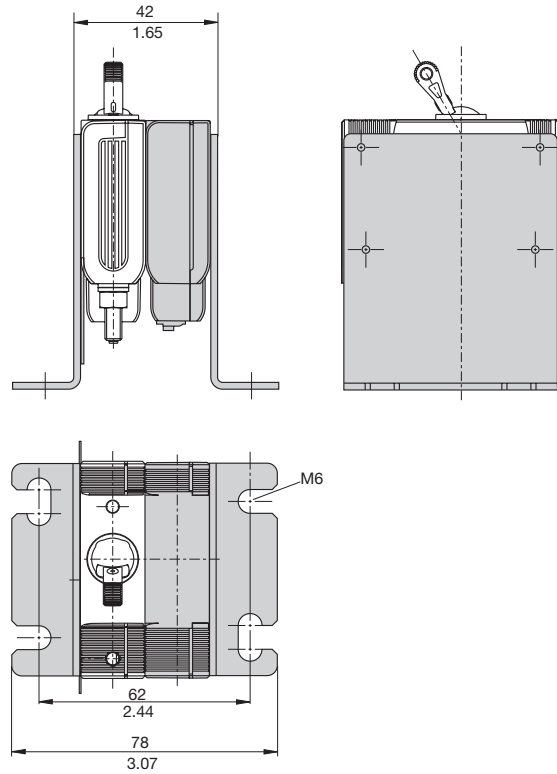

4

This is a metric design and millimeter dimensions take precedence (mm/inch)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.